



Shaanxi Gainhui Heavy Industries Co., Ltd.
Bearing Manufacturer And Supplier In China

BECAUSE WE ARE FOCUSED WE ARE PROFESSIONAL

We are committed to providing competitive bearing products and OEM services to global customers.




NSK Roller Bearings




Bearing Series:

20000CE4 series, 20000CKE4 series,
20000CAE4 series, 20000CAKE4 series,
20000CDE4 series, 20000CDKE4 series







Cylindrical Bore



Tapered Bore



Without an Oil Groove or Holes



Dynamic Equivalent Load

$$P = X F_r + Y F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	$r_{min.}$	C_r	C_{0r}	C_r	C_{0r}	Grease	Oil	
20	52	15	1.1	29 300	26 900	2 980	2 740	6 300	8 200	21304CDE4
25	52 62	18 17	1 1.1	37 500 43 000	37 000 40 500	3 850 4 350	3 800 4 150	7 100 5 300	9 000 6 700	22205CE4 21305CDE4
30	62 72	20 19	1 1.1	50 000 55 000	50 000 54 000	5 100 5 600	5 100 5 500	6 000 4 500	7 500 6 000	22206CE4 21306CDE4
35	72 80	23 21	1.1 1.5	69 000 71 500	71 000 76 000	7 050 7 250	7 200 7 750	5 300 4 000	6 700 5 300	22207CE4 21307CDE4
40	80 90 90	23 23 33	1.1 1.5 1.5	113 000 118 000 170 000	99 500 111 000 153 000	11 500 12 000 17 300	10 100 11 300 15 600	6 700 6 000 5 300	8 500 7 500 6 700	*22208EAE4 *21308EAE4 *22308EAE4
45	85 100 100	23 25 36	1.1 1.5 1.5	118 000 149 000 207 000	111 000 144 000 195 000	12 000 15 200 21 100	11 300 14 600 19 900	6 000 5 000 4 500	7 500 6 300 5 600	*22209EAE4 *21309EAE4 *22309EAE4
50	90 110 110	23 27 40	1.1 2 2	124 000 178 000 246 000	119 000 174 000 234 000	12 600 18 100 25 100	12 100 17 800 23 900	5 600 4 500 4 300	7 100 5 600 5 300	*22210EAE4 *21310EAE4 *22310EAE4
55	100 120 120	25 29 43	1.5 2 2	149 000 178 000 292 000	144 000 174 000 292 000	15 200 18 100 29 800	14 600 17 800 29 800	5 300 4 500 3 800	6 700 5 600 4 800	*22211EAE4 *21311EAE4 *22311EAE4


Note (1) The suffix K represents bearings with tapered bores (taper 1 : 12).

Numbers	Abutment and Fillet Dimensions (mm)					Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	d_a max.	D_a max.	D_a min.	r_a max.		Y_2	Y_3	Y_0	
21304CDKE4	27	28	45	42	1	0.31	3.2	2.1	2.1	0.17
22205CKE4 21305CDKE4	31 32	31 34	46 55	45 51	1 1	0.35 0.29	2.9 3.4	1.9 2.3	1.9 2.3	0.17 0.26
22206CKE4 21306CDKE4	36 37	37 40	56 65	54 59	1 1	0.33 0.28	3.1 3.6	2.1 2.4	2.0 2.3	0.27 0.39
22207CKE4 21307CDKE4	42 44	43 47	65 71	63 67	1 1.5	0.32 0.28	3.1 3.6	2.1 2.4	2.0 2.4	0.42 0.53
*22208EAKE4 *21308EAKE4 *22308EAKE4	47 49 49	49 54 52	73 81 81	70 75 77	1 1.5 1.5	0.28 0.25 0.35	3.6 3.9 2.8	2.4 2.7 1.9	2.4 2.6 1.9	0.50 0.73 0.98
*22209EAKE4 *21309EAKE4 *22309EAKE4	52 54 54	54 65 59	78 91 91	75 89 86	1 1.5 1.5	0.25 0.23 0.34	3.9 4.3 2.9	2.7 2.9 2.0	2.6 2.8 1.9	0.55 0.96 1.34
*22210EAKE4 *21310EAKE4 *22310EAKE4	57 60 60	60 72 64	83 100 100	81 98 93	1 2 2	0.24 0.23 0.35	4.3 4.4 2.8	2.9 3.0 1.9	2.8 2.9 1.9	0.61 1.21 1.78
*22211EAKE4 *21311EAKE4 *22311EAKE4	64 65 65	65 72 73	91 110 110	89 98 103	1.5 2 2	0.23 0.23 0.34	4.3 4.4 2.9	2.9 3.0 2.0	2.8 2.9 1.9	0.81 1.58 2.3


- Remarks**
- The bearings denoted by an asterisk (*) are NSKHPS bearings and an oil groove and holes are standard for them.
 - When making a selection of the recommended fit (Tolerance of Shaft) on Page A84 of the NSK Rolling Bearings catalog, in case of NSKHPS bearings, the conditions are different.
The segmentations are: Light Loads ($\leq 0.05C_r$); Normal Loads (0.05 to $0.10C_r$); and Heavy Loads ($> 0.10C_r$).
 - For the dimensions of adapters and withdrawal sleeves, refer to Pages **B358** – **B359**, and **B366**.




Cylindrical Bore



Tapered Bore



Without an Oil Groove or Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	$r_{min.}$	C_r (N)	C_{0r}	C_r {kgf}	C_{0r}	Grease	Oil	
60	95	26	1.1	98 000	141 000	10 000	14 400	3 600	4 500	*23012CE4 *22212EAE4 *21312EAE4 *22312EAE4
	110	28	1.5	178 000	174 000	18 100	17 800	4 800	6 000	
	130	31	2.1	238 000	244 000	24 200	24 900	3 800	4 800	
	130	46	2.1	340 000	340 000	34 500	35 000	3 600	4 500	
65	120	31	1.5	221 000	230 000	22 500	23 500	4 300	5 300	*22213EAE4 *21313EAE4 *22313EAE4
	140	33	2.1	264 000	275 000	27 000	28 000	3 600	4 500	
	140	48	2.1	375 000	380 000	38 000	38 500	3 200	4 000	
70	125	31	1.5	225 000	232 000	22 900	23 600	4 000	5 300	*22214EAE4 *21314EAE4 *22314EAE4
	150	35	2.1	310 000	325 000	32 000	33 500	3 200	4 000	
	150	51	2.1	425 000	435 000	43 500	44 000	3 000	3 800	
75	130	31	1.5	238 000	244 000	24 200	24 900	4 000	5 000	*22215EAE4 *21315EAE4 *22315EAE4
	160	37	2.1	310 000	325 000	32 000	33 500	3 200	4 000	
	160	55	2.1	485 000	505 000	49 500	51 500	2 800	3 600	
80	140	33	2	264 000	275 000	27 000	28 000	3 600	4 500	*22216EAE4 *21316EAE4 *22316EAE4
	170	39	2.1	355 000	375 000	36 000	38 000	3 000	3 800	
	170	58	2.1	540 000	565 000	55 000	58 000	2 600	3 400	
85	150	36	2	310 000	325 000	32 000	33 500	3 400	4 300	*22217EAE4 *21317EAE4 *22317EAE4
	180	41	3	360 000	395 000	37 000	40 000	3 000	4 000	
	180	60	3	600 000	630 000	61 000	64 000	2 400	3 200	


Note (1) The suffix K represents bearings with tapered bores (taper 1 : 12).

Numbers	Abutment and Fillet Dimensions (mm)					Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	d_a max.	D_a max.	D_a min.	r_a max.		Y_2	Y_3	Y_0	
*23012CKE4 *22212EAKE4 *21312EAKE4 *22312EAKE4	67	68	88	85	1	0.26	3.9	2.6	2.5	0.68
	69	72	101	98	1.5	0.23	4.4	3.0	2.9	1.1
	72	87	118	117	2	0.22	4.5	3.0	3.0	1.98
	72	79	118	111	2	0.34	3.0	2.0	1.9	2.89
*22213EAKE4 *21313EAKE4 *22313EAKE4	74	80	111	107	1.5	0.24	4.2	2.8	2.7	1.51
	77	94	128	126	2	0.22	4.6	3.1	3.0	2.45
	77	84	128	119	2	0.33	3.0	2.0	2.0	3.52
*22214EAKE4 *21314EAKE4 *22314EAKE4	79	84	116	111	1.5	0.23	4.3	2.9	2.8	1.58
	82	101	138	135	2	0.22	4.6	3.1	3.0	3.0
	82	91	138	129	2	0.33	3.0	2.0	2.0	4.28
*22215EAKE4 *21315EAKE4 *22315EAKE4	84	87	121	117	1.5	0.22	4.5	3.0	3.0	1.64
	87	101	148	134	2	0.22	4.6	3.1	3.0	3.64
	87	97	148	137	2	0.33	3.0	2.0	2.0	5.26
*22216EAKE4 *21316EAKE4 *22316EAKE4	90	94	130	126	2	0.22	4.6	3.1	3.0	2.01
	92	109	158	146	2	0.23	4.4	3.0	2.9	4.32
	92	103	158	145	2	0.33	3.0	2.0	2.0	6.23
*22217EAKE4 *21317EAKE4 *22317EAKE4	95	101	140	135	2	0.22	4.6	3.1	3.0	2.54
	99	108	166	142	2.5	0.24	4.3	2.9	2.8	5.2
	99	110	166	155	2.5	0.33	3.1	2.1	2.0	7.23


- Remarks**
- The bearings denoted by an asterisk (*) are NSKHPS bearings and an oil groove and holes are standard for them.
 - When making a selection of the recommended fit (Tolerance of Shaft) on Page A84 of the NSK Rolling Bearings catalog, in case of NSKHPS bearings, the conditions are different.
The segmentations are: Light Loads ($\leq 0.05C_r$); Normal Loads (0.05 to $0.10C_r$); and Heavy Loads ($> 0.10C_r$).
 - For the dimensions of adapters and withdrawal sleeves, refer to Pages **B359** – **B361**, and **B366**.




Cylindrical Bore



Tapered Bore



Without an Oil Groove or Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	$r_{min.}$	C_r	C_{0r}	C_r	C_{0r}	Grease	Oil	
				(N)						
				{kgf}						
90	160	40	2	360 000	395 000	37 000	40 000	3 200	4 000	*22218EAE4 23218CE4 *21318EAE4 *22318EAE4
	160	52.4	2	340 000	490 000	34 500	50 000	1 800	2 400	
	190	43	3	415 000	450 000	42 000	46 000	2 800	3 600	
	190	64	3	665 000	705 000	68 000	72 000	2 400	3 000	
95	170	43	2.1	415 000	450 000	42 000	46 000	3 000	3 800	*22219EAE4 23219CAE4 21319CE4 *22319EAE4
	170	55.6	2.1	370 000	525 000	37 500	53 500	1 700	2 200	
	200	45	3	345 000	435 000	35 000	44 500	1 500	2 000	
	200	67	3	735 000	780 000	75 000	79 500	2 200	2 800	
100	150	37	1.5	212 000	335 000	21 600	34 500	2 200	2 800	23020CDE4 24020CE4 23120CE4
	150	50	1.5	276 000	470 000	28 100	48 000	1 800	2 400	
	165	52	2	345 000	530 000	35 500	54 000	1 700	2 200	
	165	65	2	345 000	535 000	35 000	55 000	1 700	2 200	
	180	46	2.1	455 000	490 000	46 500	50 000	2 800	3 600	24120CAE4 *22220EAE4 23220CE4
	180	60.3	2.1	420 000	605 000	42 500	61 500	1 600	2 200	
	215	47	3	395 000	485 000	40 500	49 500	1 400	1 900	
	215	73	3	860 000	930 000	88 000	94 500	2 000	2 600	
110	170	45	2	293 000	465 000	29 900	47 500	2 000	2 400	23022CDE4 24022CE4 23122CE4
	170	60	2	380 000	645 000	38 500	66 000	1 600	2 200	
	180	56	2	385 000	630 000	39 500	64 000	1 600	2 000	
	180	69	2	460 000	750 000	47 000	76 500	1 600	2 000	
	200	53	2.1	605 000	645 000	61 500	66 000	2 600	3 200	24122CE4 *22222EAE4 23222CE4
	200	69.8	2.1	515 000	760 000	52 500	77 500	1 500	1 900	
	240	50	3	450 000	545 000	46 000	55 500	1 300	1 700	
	240	80	3	1030 000	1 120 000	105 000	115 000	1 900	2 400	


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)					Constant	Axial Load Factors			Mass (kg)
Tapered Bore ⁽¹⁾	d_a		D_a		r_a	e	Y_2	Y_3	Y_0	
	min.	max.	max.	min.	max.					approx.
*22218EAKE4	100	108	150	142	2	0.24	4.3	2.9	2.8	3.3
23218CKE4	100	105	150	138	2	0.32	3.2	2.1	2.1	4.51
*21318EAKE4	104	115	176	152	2.5	0.24	4.3	2.9	2.8	6.1
*22318EAKE4	104	115	176	163	2.5	0.33	3.1	2.1	2.0	8.56
*22219EAKE4	107	115	158	152	2	0.24	4.3	2.9	2.8	4.04
23219CAKE4	107	—	158	146	2	0.32	3.1	2.1	2.0	5.33
21319CKE4	109	127	186	172	2.5	0.22	4.6	3.1	3.0	6.92
*22319EAKE4	109	121	186	172	2.5	0.33	3.1	2.1	2.0	9.91
23020CDKE4	109	112	141	136	1.5	0.22	4.6	3.1	3.0	2.31
24020CK30E4	109	110	141	132	1.5	0.30	3.4	2.3	2.2	3.08
23120CKE4	110	113	155	144	2	0.30	3.4	2.3	2.2	4.38
24120CAK30E4	110	—	155	143	2	0.35	2.9	1.9	1.9	5.42
*22220EAKE4	112	119	168	160	2	0.24	4.3	2.9	2.8	4.84
23220CKE4	112	118	168	155	2	0.32	3.2	2.1	2.1	6.6
21320CKE4	114	133	201	184	2.5	0.21	4.7	3.2	3.1	8.46
*22320EAKE4	114	130	201	184	2.5	0.33	3.0	2.0	2.0	12.7
23022CDKE4	120	124	160	153	2	0.24	4.2	2.8	2.8	3.76
24022CK30E4	120	121	160	148	2	0.32	3.1	2.1	2.1	4.96
23122CKE4	120	127	170	158	2	0.28	3.5	2.4	2.3	5.7
24122CK30E4	120	123	170	154	2	0.36	2.8	1.9	1.8	6.84
*22222EAKE4	122	129	188	178	2	0.25	4.0	2.7	2.6	6.99
23222CKE4	122	130	188	170	2	0.34	3.0	2.0	1.9	9.54
21322CAKE4	124	—	226	206	2.5	0.22	4.6	3.1	3.0	11.2
*22322EAKE4	124	145	226	206	2.5	0.33	3.1	2.1	2.0	17.6


- Remarks**
- The bearings denoted by an asterisk (*) are NSKHPS bearings and an oil groove and holes are standard for them.
 - When making a selection of the recommended fit (Tolerance of Shaft) on Page A84 of the NSK Rolling Bearings catalog, in case of NSKHPS bearings, the conditions are different.
The segmentations are: Light Loads ($\leq 0.05C_r$); Normal Loads (0.05 to $0.10C_r$); and Heavy Loads ($> 0.10C_r$).
 - For the dimensions of adapters and withdrawal sleeves, refer to Pages **B360** – **B361**, and **B366** – **B367**.




Cylindrical Bore



Tapered Bore



Without an Oil Groove or Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings (N)				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	$r_{min.}$	C_r	C_{0r}	C_r	C_{0r}	Grease	Oil	
120	180	46	2	315 000	525 000	32 000	53 500	1 800	2 200	23024CDE4 24024CE4 23124CE4
	180	60	2	395 000	705 000	40 500	72 000	1 500	2 000	
	200	62	2	465 000	720 000	47 500	73 500	1 400	1 800	
	200	80	2	575 000	950 000	58 500	96 500	1 400	1 800	24124CE4 *22224EAE4 23224CE4 *22324EAE4
	215	58	2.1	685 000	765 000	70 000	78 000	2 400	3 000	
	215	76	2.1	630 000	970 000	64 500	99 000	1 300	1 700	
	260	86	3	1190 000	1 320 000	122 000	134 000	1 700	2 200	
	200	52	2	400 000	655 000	40 500	67 000	1 700	2 000	23026CDE4 24026CE4 23126CE4
	200	69	2	495 000	865 000	50 500	88 000	1 400	1 800	
	210	64	2	505 000	825 000	51 500	84 500	1 300	1 700	
130	210	80	2	590 000	1 010 000	60 000	103 000	1 300	1 700	24126CE4 *22226EAE4 23226CE4 22326CE4
	230	64	3	820 000	940 000	83 500	96 000	2 200	2 600	
	230	80	3	700 000	1 080 000	71 500	110 000	1 200	1 600	
	280	93	4	995 000	1 350 000	101 000	137 000	1 300	1 600	
	210	53	2	420 000	715 000	43 000	73 000	1 600	1 900	23028CDE4 24028CE4 23128CE4
	210	69	2	525 000	945 000	53 500	96 500	1 300	1 700	
140	225	68	2.1	580 000	945 000	59 000	96 500	1 200	1 600	
	225	85	2.1	670 000	1 160 000	68 500	118 000	1 200	1 600	24128CE4 22228CDE4 23228CE4 22328CE4
	250	68	3	645 000	930 000	65 500	95 000	1 400	1 700	
	250	88	3	835 000	1 300 000	85 000	133 000	1 100	1 500	
	300	102	4	1 160 000	1 590 000	118 000	162 000	1 200	1 500	
	225	56	2.1	470 000	815 000	48 000	83 000	1 400	1 800	23030CDE4 24030CE4 23130CE4
150	225	75	2.1	590 000	1 090 000	60 500	111 000	1 200	1 500	
	250	80	2.1	725 000	1 180 000	74 000	121 000	1 100	1 400	
	250	100	2.1	890 000	1 530 000	91 000	156 000	1 100	1 400	24130CE4 22230CDE4 23230CE4 22330CAE4
	270	73	3	765 000	1 120 000	78 000	114 000	1 300	1 600	
	270	96	3	975 000	1 560 000	99 500	159 000	1 100	1 400	
	320	108	4	1 220 000	1 690 000	125 000	172 000	1 100	1 400	


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)					Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	d_a max.	D_a max.	D_a min.	r_a max.		Y_2	Y_3	Y_0	
23024CDKE4 24024CK30E4 23124CKE4	130	134	170	163	2	0.22	4.5	3.0	2.9	4.11
	130	131	170	158	2	0.32	3.2	2.1	2.1	5.33
	130	138	190	175	2	0.29	3.5	2.4	2.3	7.85
24124CK30E4 *22224EAKE4 23224CKE4 *22324EAKE4	130	136	190	171	2	0.37	2.7	1.8	1.8	10
	132	142	203	190	2	0.25	3.9	2.7	2.6	8.8
	132	140	203	182	2	0.34	2.9	2.0	1.9	12.1
	134	157	246	222	2.5	0.32	3.1	2.1	2.0	22.2
23026CDKE4 24026CK30E4 23126CKE4	140	147	190	180	2	0.23	4.3	2.9	2.8	5.98
	140	143	190	175	2	0.31	3.2	2.2	2.1	7.84
	140	149	200	184	2	0.28	3.6	2.4	2.4	8.69
24126CK30E4 *22226EAKE4 23226CKE4 22326CKE4	140	146	200	180	2	0.35	2.9	1.9	1.9	10.7
	144	152	216	204	2.5	0.26	3.8	2.6	2.5	11
	144	150	216	196	2.5	0.34	2.9	2.0	1.9	14.3
	148	166	262	236	3	0.34	2.9	2.0	1.9	28.1
	150	157	200	190	2	0.22	4.5	3.0	2.9	6.49
23028CDKE4 24028CK30E4 23128CKE4	150	154	200	186	2	0.29	3.4	2.3	2.2	8.37
	152	158	213	198	2	0.28	3.6	2.4	2.3	10.5
	152	156	213	193	2	0.35	2.9	1.9	1.9	13
24128CK30E4 22228CDKE4 23228CKE4 22328CKE4	154	167	236	219	2.5	0.25	4.0	2.7	2.6	14.5
	154	163	236	213	2.5	0.35	2.9	1.9	1.9	18.8
	158	177	282	253	3	0.35	2.9	1.9	1.9	35.4
	162	168	213	203	2	0.22	4.6	3.1	3.0	7.9
23030CDKE4 24030CK30E4 23130CKE4	162	165	213	198	2	0.30	3.4	2.3	2.2	10.5
	162	174	238	218	2	0.30	3.4	2.3	2.2	15.8
	162	169	238	212	2	0.38	2.6	1.8	1.7	19.8
24130CK30E4 22230CDKE4 23230CKE4 22330CAE4	164	179	256	236	2.5	0.26	3.9	2.6	2.5	18.4
	164	176	256	230	2.5	0.35	2.9	1.9	1.9	24.2
	168	—	302	270	3	0.35	2.9	1.9	1.9	41.5
	168	—	302	270	3	0.35	2.9	1.9	1.9	41.5

- Remarks**
- The bearings denoted by an asterisk (*) are NSKHPS bearings and an oil groove and holes are standard for them.
 - When making a selection of the recommended fit (Tolerance of Shaft) on Page A84 of the NSK Rolling Bearings catalog, in case of NSKHPS bearings, the conditions are different.
The segmentations are: Light Loads ($\leq 0.05C_r$); Normal Loads (0.05 to $0.10C_r$); and Heavy Loads ($> 0.10C_r$).
 - For the dimensions of adapters and withdrawal sleeves, refer to Pages **B361** – **B362**, and **B367** – **B368**.




Cylindrical Bore



Tapered Bore



Without an Oil Groove and Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	r min.	C_r (N)	C_{0r} (N)	C_r {kgf}	C_{0r} {kgf}	Grease	Oil	
160	220	45	2	360 000	675 000	37 000	69 000	1 400	1 800	23932CAE4
	240	60	2.1	540 000	955 000	55 000	97 500	1 300	1 700	23032CDE4
	240	80	2.1	680 000	1 260 000	69 000	128 000	1 100	1 400	24032CE4
	270	86	2.1	855 000	1 400 000	87 000	143 000	1 000	1 300	23132CE4
	270	109	2.1	1 040 000	1 760 000	106 000	179 000	1 000	1 300	24132CE4
	290	80	3	910 000	1 320 000	93 000	135 000	1 200	1 500	22232CDE4
	290	104	3	1 100 000	1 770 000	112 000	180 000	1 000	1 300	23232CE4
	340	114	4	1 360 000	1 900 000	139 000	193 000	1 100	1 300	22332CAE4
	230	45	2	350 000	660 000	35 500	67 500	1 400	1 800	23934BCAE4
	260	67	2.1	640 000	1 090 000	65 000	112 000	1 200	1 600	23034CDE4
170	260	90	2.1	825 000	1 520 000	84 000	155 000	1 000	1 300	24034CE4
	280	88	2.1	940 000	1 570 000	96 000	160 000	1 000	1 300	23134CE4
	280	109	2.1	1 080 000	1 860 000	110 000	190 000	1 000	1 300	24134CE4
	310	86	4	990 000	1 500 000	101 000	153 000	1 100	1 400	22234CDE4
	310	110	4	1 200 000	1 910 000	122 000	195 000	900	1 200	23234CE4
	360	120	4	1 580 000	2 110 000	161 000	215 000	1 000	1 200	22334CAE4
	250	52	2	470 000	890 000	48 000	90 500	1 200	1 600	23936CAE4
	280	74	2.1	750 000	1 270 000	76 000	129 000	1 200	1 400	23036CDE4
	280	100	2.1	965 000	1 750 000	98 500	178 000	950	1 200	24036CE4
	300	96	3	1 050 000	1 760 000	108 000	180 000	900	1 200	23136CE4
180	300	118	3	1 190 000	2 040 000	121 000	208 000	900	1 200	24136CE4
	320	86	4	1 020 000	1 540 000	104 000	157 000	1 100	1 300	22236CDE4
	320	112	4	1 300 000	2 110 000	133 000	215 000	850	1 100	23236CE4
	380	126	4	1 740 000	2 340 000	177 000	238 000	950	1 200	22336CAE4
	260	52	2	460 000	875 000	47 000	89 500	1 200	1 500	23938CAE4
	290	75	2.1	775 000	1 350 000	79 000	138 000	1 100	1 400	23038CAE4
	290	100	2.1	975 000	1 840 000	99 500	188 000	900	1 200	24038CE4
	320	104	3	1 190 000	2 020 000	121 000	206 000	850	1 100	23138CE4
	320	128	3	1 370 000	2 330 000	140 000	238 000	850	1 100	24138CE4
	340	92	4	1 140 000	1 730 000	116 000	176 000	1 000	1 200	22238CAE4
190	340	120	4	1 440 000	2 350 000	147 000	240 000	800	1 100	23238CE4
	400	132	5	1 890 000	2 590 000	193 000	264 000	900	1 100	22338CAE4


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)					Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	d_a max.	D_a max.	D_a min.	r_a max.		Y_2	Y_3	Y_0	
Tapered Bore ⁽¹⁾	170	—	210	203	2	0.18	5.6	3.8	3.7	4.97
	172	179	228	216	2	0.22	4.5	3.0	2.9	9.66
	172	177	228	212	2	0.30	3.4	2.3	2.2	12.7
	172	185	258	234	2	0.30	3.4	2.3	2.2	20.3
	172	179	258	229	2	0.39	2.6	1.7	1.7	25.4
	174	190	276	255	2.5	0.26	3.8	2.6	2.5	23.1
	174	189	276	245	2.5	0.34	2.9	2.0	1.9	30.5
	178	—	322	287	3	0.35	2.9	1.9	1.9	49.3
	180	—	220	213	2	0.17	5.8	3.9	3.8	5.38
	182	191	248	233	2	0.23	4.3	2.9	2.8	13
	182	188	248	228	2	0.31	3.2	2.2	2.1	17.3
	182	194	268	245	2	0.29	3.5	2.3	2.3	21.8
	182	190	268	239	2	0.37	2.7	1.8	1.8	26.6
	188	206	292	270	3	0.26	3.8	2.6	2.5	28.8
	188	201	292	261	3	0.34	2.9	2.0	1.9	36.4
	188	—	342	304	3	0.35	2.9	1.9	1.9	57.9
	190	—	240	230	2	0.18	5.5	3.7	3.6	7.64
	192	202	268	249	2	0.24	4.2	2.8	2.8	17.1
	192	200	268	245	2	0.32	3.1	2.1	2.0	22.7
	194	206	286	260	2.5	0.30	3.4	2.3	2.2	27.5
	194	202	286	255	2.5	0.37	2.7	1.8	1.8	33.1
	198	212	302	278	3	0.26	3.9	2.6	2.6	30.2
	198	211	302	274	3	0.33	3.0	2.0	2.0	38.9
	198	—	362	322	3	0.34	2.9	2.0	1.9	67
	200	—	250	240	2	0.18	5.7	3.8	3.7	8.03
	202	—	278	261	2	0.24	4.2	2.8	2.8	17.6
	202	210	278	253	2	0.31	3.2	2.2	2.1	24
	204	219	306	276	2.5	0.31	3.3	2.2	2.2	34.5
	204	211	306	269	2.5	0.40	2.5	1.7	1.6	41.5
	208	—	322	296	3	0.26	3.8	2.6	2.5	35.5
	208	222	322	288	3	0.35	2.9	1.9	1.9	47.6
	212	—	378	338	4	0.34	2.9	2.0	1.9	77.6

Remarks For the dimensions of adapters and withdrawal sleeves, refer to Pages B362 and B368.




Cylindrical Bore



Tapered Bore



Without an Oil Groove and Holes



Dynamic Equivalent Load

$$P = X F_r + Y F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	r min.	C_r (N)	C_{0r} (N)	C_r {kgf}	C_{0r} {kgf}	Grease	Oil	
200	280	60	2.1	570 000	1 060 000	58 000	108 000	1 100	1 400	23940CAE4
	310	82	2.1	940 000	1 700 000	96 000	174 000	1 000	1 300	23040CAE4
	310	109	2.1	1 140 000	2 120 000	116 000	216 000	850	1 100	24040CE4
	340	112	3	1 360 000	2 330 000	139 000	238 000	800	1 000	23140CE4
	340	140	3	1 570 000	2 670 000	160 000	272 000	800	1 000	24140CE4
	360	98	4	1 300 000	2 010 000	133 000	204 000	950	1 200	22240CAE4
220	360	128	4	1 660 000	2 750 000	169 000	281 000	750	1 000	23240CE4
	420	138	5	2 000 000	2 990 000	204 000	305 000	850	1 000	22340CAE4
	300	60	2.1	625 000	1 240 000	64 000	126 000	1 000	1 300	23944CAE4
	340	90	3	1 090 000	1 980 000	111 000	202 000	950	1 200	23044CAE4
	340	118	3	1 360 000	2 600 000	138 000	265 000	750	1 000	24044CE4
	370	120	4	1 570 000	2 710 000	160 000	276 000	710	950	23144CE4
240	370	150	4	1 800 000	3 200 000	183 000	325 000	710	950	24144CE4
	400	108	4	1 570 000	2 430 000	160 000	247 000	850	1 000	22244CAE4
	400	144	4	2 020 000	3 400 000	206 000	350 000	670	900	23244CE4
	460	145	5	2 350 000	3 400 000	240 000	345 000	750	950	22344CAE4
	320	60	2.1	635 000	1 300 000	65 000	133 000	950	1 200	23948CAE4
	360	92	3	1 160 000	2 140 000	118 000	218 000	850	1 100	23048CAE4
260	360	118	3	1 390 000	2 730 000	141 000	278 000	710	950	24048CE4
	400	128	4	1 790 000	3 100 000	182 000	320 000	670	850	23148CE4
	400	160	4	2 130 000	3 800 000	217 000	385 000	670	850	24148CE4
	440	120	4	1 870 000	2 890 000	191 000	294 000	750	950	22248CAE4
	440	160	4	2 440 000	4 050 000	249 000	415 000	630	800	23248CAE4
	500	155	5	2 600 000	3 800 000	265 000	385 000	670	850	22348CAE4
280	360	75	2.1	930 000	1 870 000	95 000	191 000	850	1 000	23952CAE4
	400	104	4	1 430 000	2 580 000	145 000	263 000	800	950	23052CAE4
	400	140	4	1 810 000	3 500 000	185 000	360 000	630	850	24052CAE4
	440	144	4	2 160 000	3 750 000	221 000	385 000	600	800	23152CAE4
	440	180	4	2 560 000	4 700 000	261 000	480 000	600	800	24152CAE4
	480	130	5	2 180 000	3 400 000	222 000	345 000	670	850	22252CAE4
300	480	174	5	2 740 000	4 550 000	279 000	460 000	560	750	23252CAE4
	540	165	6	3 100 000	4 600 000	320 000	470 000	630	800	22352CAE4


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)					Constant	Axial Load Factors			Mass (kg)
Tapered Bore ⁽¹⁾	d_a		D_a		r_a	e	Y_2	Y_3	Y_0	
	min.	max.	max.	min.	max.					approx.
23940CAKE4	212	—	268	258	2	0.20	5.1	3.4	3.3	11
23040CAKE4	212	—	298	279	2	0.25	4.0	2.7	2.6	22.6
24040CK30E4	212	223	298	271	2	0.32	3.1	2.1	2.0	30.4
23140CKE4	214	232	326	293	2.5	0.31	3.2	2.2	2.1	42.7
24140CK30E4	214	226	326	290	2.5	0.39	2.6	1.8	1.7	51.3
22240CAKE4	218	—	342	315	3	0.26	3.8	2.6	2.5	42.6
23240CKE4	218	237	342	307	3	0.34	2.9	2.0	1.9	57.1
22340CAKE4	222	—	398	352	4	0.34	2.9	2.0	1.9	92.6
23944CAKE4	232	—	288	278	2	0.18	5.7	3.8	3.7	12.2
23044CAKE4	234	—	326	302	2.5	0.24	4.1	2.8	2.7	29.7
24044CK30E4	234	244	326	296	2.5	0.31	3.2	2.1	2.1	40.5
23144CKE4	238	254	352	320	3	0.30	3.3	2.2	2.2	53
24144CK30E4	238	248	352	313	3	0.39	2.6	1.7	1.7	66.7
22244CAKE4	238	—	382	348	3	0.27	3.7	2.5	2.4	59
23244CKE4	238	260	382	337	3	0.35	2.9	1.9	1.9	80.4
22344CAKE4	242	—	438	391	4	0.33	3.0	2.0	2.0	116
23948CAKE4	252	—	308	298	2	0.17	6.0	4.0	3.9	13.3
23048CAKE4	254	—	346	324	2.5	0.24	4.2	2.8	2.7	32.6
24048CK30E4	254	265	346	317	2.5	0.29	3.4	2.3	2.2	43.4
23148CKE4	258	275	382	347	3	0.30	3.3	2.2	2.2	66.9
24148CK30E4	258	268	382	341	3	0.38	2.7	1.8	1.8	79.5
22248CAKE4	258	—	422	383	3	0.27	3.7	2.5	2.4	80.2
23248CAKE4	258	—	422	372	3	0.37	2.7	1.8	1.8	106
22348CAKE4	262	—	478	423	4	0.32	3.2	2.1	2.1	147
23952CAKE4	272	—	348	333	2	0.19	5.4	3.6	3.5	23
23052CAKE4	278	—	382	356	3	0.25	4.1	2.7	2.7	46.6
24052CAK30E4	278	—	382	348	3	0.32	3.1	2.1	2.1	62.6
23152CAKE4	278	—	422	380	3	0.32	3.2	2.1	2.1	88.2
24152CAK30E4	278	—	422	371	3	0.39	2.6	1.7	1.7	109
22252CAKE4	282	—	458	418	4	0.27	3.7	2.5	2.5	104
23252CAKE4	282	—	458	406	4	0.37	2.7	1.8	1.8	137
22352CAKE4	288	—	512	462	5	0.32	3.2	2.1	2.1	180

Remarks For the dimensions of adapters and withdrawal sleeves, refer to Pages B363 and B369.




Cylindrical Bore



Tapered Bore



Without an Oil Groove and Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings (N)				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	$r_{min.}$	C_r	C_{0r}	$\{kgf\}$ C_r	C_{0r}	Grease	Oil	
280	380	75	2.1	925 000	1 950 000	94 500	199 000	800	950	23956CAE4
	420	106	4	1 540 000	2 950 000	157 000	300 000	710	900	23056CAE4
	420	140	4	1 880 000	3 800 000	191 000	385 000	600	800	24056CAE4
	460	146	5	2 230 000	4 000 000	228 000	410 000	560	750	23156CAE4
	460	180	5	2 640 000	5 000 000	269 000	505 000	560	750	24156CAE4
	500	130	5	2 280 000	3 650 000	233 000	370 000	630	800	22256CAE4
	500	176	5	2 880 000	4 900 000	294 000	500 000	530	670	23256CAE4
	580	175	6	3 500 000	5 150 000	355 000	525 000	560	710	22356CAE4
	420	90	3	1 230 000	2 490 000	125 000	254 000	710	900	23960CAE4
	460	118	4	1 920 000	3 700 000	196 000	375 000	670	850	23060CAE4
	460	160	4	2 310 000	4 600 000	235 000	470 000	530	710	24060CAE4
	500	160	5	2 670 000	4 800 000	273 000	490 000	500	670	23160CAE4
300	500	200	5	3 100 000	5 800 000	315 000	595 000	500	670	24160CAE4
	540	140	5	2 610 000	4 250 000	266 000	430 000	600	750	22260CAE4
	540	192	5	3 400 000	5 900 000	350 000	600 000	480	630	23260CAE4
	440	90	3	1 300 000	2 750 000	132 000	281 000	670	850	23964CAE4
	480	121	4	1 960 000	3 850 000	200 000	395 000	630	800	23064CAE4
	480	160	4	2 440 000	5 050 000	249 000	515 000	500	670	24064CAE4
	540	176	5	3 050 000	5 500 000	315 000	560 000	480	600	23164CAE4
	540	218	5	3 550 000	6 650 000	360 000	675 000	480	600	24164CAE4
	580	150	5	2 990 000	4 850 000	305 000	495 000	530	670	22264CAE4
	580	208	5	3 900 000	6 900 000	395 000	700 000	450	600	23264CAE4
	460	90	3	1 330 000	2 840 000	136 000	289 000	630	800	23968CAE4
	520	133	5	2 280 000	4 400 000	232 000	445 000	560	710	23068CAE4
320	520	180	5	2 920 000	6 050 000	298 000	615 000	480	600	24068CAE4
	580	190	5	3 600 000	6 600 000	370 000	670 000	430	560	23168CAE4
	580	243	5	4 250 000	7 900 000	430 000	810 000	430	560	24168CAE4
	620	224	6	4 400 000	7 800 000	450 000	795 000	400	530	23268CAE4


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)				Constant	Axial Load Factors			Mass (kg)
Tapered Bore ⁽¹⁾	d_a min.	D_a max.	r_a min.	r_a max.	e	Y_2	Y_3	Y_0	approx.
23956CAKE4	292	368	351	2	0.18	5.7	3.9	3.8	24.5
23056CAKE4	298	402	377	3	0.24	4.2	2.8	2.7	50.5
24056CAK30E4	298	402	369	3	0.31	3.3	2.2	2.2	66.4
23156CAKE4	302	438	400	4	0.30	3.3	2.2	2.2	94.3
24156CAK30E4	302	438	392	4	0.37	2.7	1.8	1.8	115
22256CAKE4	302	478	439	4	0.25	4.0	2.7	2.6	110
23256CAKE4	302	478	425	4	0.35	2.9	1.9	1.9	147
22356CAKE4	308	552	496	5	0.31	3.2	2.1	2.1	221
23960CAKE4	314	406	386	2.5	0.19	5.2	3.5	3.4	38.2
23060CAKE4	318	442	413	3	0.24	4.2	2.8	2.7	70.5
24060CAK30E4	318	442	400	3	0.32	3.1	2.1	2.0	93.6
23160CAKE4	322	478	433	4	0.31	3.3	2.2	2.2	125
24160CAK30E4	322	478	423	4	0.38	2.6	1.8	1.7	152
22260CAKE4	322	518	473	4	0.25	4.0	2.7	2.6	139
23260CAKE4	322	518	458	4	0.35	2.9	1.9	1.9	189
23964CAKE4	334	426	406	2.5	0.18	5.5	3.7	3.6	40.6
23064CAKE4	338	462	432	3	0.24	4.2	2.8	2.8	75.6
24064CAK30E4	338	462	422	3	0.31	3.3	2.2	2.2	99.7
23164CAKE4	342	518	466	4	0.31	3.2	2.1	2.1	162
24164CAK30E4	342	518	456	4	0.39	2.6	1.7	1.7	196
22264CAKE4	342	558	508	4	0.26	3.9	2.6	2.6	174
23264CAKE4	342	558	488	4	0.36	2.8	1.9	1.8	239
23968CAKE4	354	446	427	2.5	0.18	5.7	3.8	3.7	42.4
23068CAKE4	362	498	465	4	0.24	4.2	2.8	2.8	101
24068CAK30E4	362	498	454	4	0.32	3.2	2.1	2.1	135
23168CAKE4	362	558	499	4	0.31	3.2	2.1	2.1	206
24168CAK30E4	362	558	489	4	0.40	2.5	1.7	1.7	257
23268CAKE4	368	592	521	5	0.36	2.8	1.9	1.8	295

Remarks For the dimensions of adapters and withdrawal sleeves, refer to Pages **B363 – B364**, and **B369 – B370**.




Cylindrical Bore



Tapered Bore



Without an Oil Groove and Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	(N)		{kgf}		Grease	Oil	Cylindrical Bore
				<i>C_r</i>	<i>C_{0r}</i>	<i>C_r</i>	<i>C_{0r}</i>			
360	480	90	3	1 390 000	3 050 000	142 000	315 000	600	750	23972CAE4
	540	134	5	2 390 000	4 700 000	244 000	480 000	530	670	23072CAE4
	540	180	5	2 930 000	6 100 000	299 000	625 000	450	600	24072CAE4
	600	192	5	3 800 000	7 100 000	390 000	725 000	400	530	23172CAE4
	600	243	5	4 200 000	8 000 000	430 000	815 000	400	530	24172CAE4
	650	232	6	4 800 000	8 550 000	490 000	870 000	380	500	23272CAE4
380	520	106	4	1 870 000	4 100 000	190 000	420 000	530	670	23976CAE4
	560	135	5	2 500 000	5 100 000	255 000	520 000	530	630	23076CAE4
	560	180	5	3 050 000	6 600 000	315 000	670 000	430	560	24076CAE4
	620	194	5	4 000 000	7 600 000	405 000	775 000	400	500	23176CAE4
	620	243	5	4 350 000	8 450 000	440 000	865 000	400	500	24176CAE4
	680	240	6	5 150 000	9 200 000	525 000	940 000	360	480	23276CAE4
400	540	106	4	1 890 000	4 250 000	193 000	435 000	530	630	23980CAE4
	600	148	5	2 970 000	5 900 000	305 000	605 000	480	600	23080CAE4
	600	200	5	3 600 000	7 600 000	370 000	775 000	400	500	24080CAE4
	650	200	6	4 150 000	7 900 000	420 000	805 000	380	480	23180CAE4
	650	250	6	4 950 000	10 100 000	505 000	1 030 000	380	480	24180CAE4
	720	256	6	5 800 000	10 400 000	590 000	1 060 000	340	450	23280CAE4
420	560	106	4	1 870 000	4 250 000	191 000	430 000	500	600	23984CAE4
	620	150	5	2 910 000	5 850 000	297 000	595 000	450	560	23084CAE4
	620	200	5	3 750 000	8 100 000	380 000	825 000	380	480	24084CAE4
	700	224	6	5 000 000	9 400 000	510 000	960 000	340	450	23184CAE4
	700	280	6	6 000 000	12 000 000	610 000	1 220 000	340	450	24184CAE4
	760	272	7.5	6 450 000	11 700 000	660 000	1 190 000	320	430	23284CAE4
440	600	118	4	2 190 000	4 800 000	223 000	490 000	450	560	23988CAE4
	650	157	6	3 150 000	6 350 000	320 000	645 000	430	530	23088CAE4
	650	212	6	4 150 000	9 100 000	425 000	930 000	360	450	24088CAE4
	720	226	6	5 300 000	10 300 000	540 000	1 060 000	320	430	23188CAE4
	720	280	6	6 000 000	12 100 000	610 000	1 230 000	320	430	24188CAE4
	790	280	7.5	6 900 000	12 800 000	705 000	1 300 000	300	400	23288CAE4


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)				Constant	Axial Load Factors			Mass (kg)
Tapered Bore ⁽¹⁾	d_a min.	D_a max.	D_a min.	r_a max.	e	Y_2	Y_3	Y_0	approx.
23972CAKE4 23072CAKE4 24072CAK30E4	374	466	447	2.5	0.17	6.0	4.1	4.0	44.7
	382	518	485	4	0.24	4.2	2.8	2.8	106
	382	518	476	4	0.32	3.2	2.1	2.1	139
23172CAKE4 24172CAK30E4 23272CAKE4	382	578	520	4	0.31	3.2	2.2	2.1	217
	382	578	507	4	0.40	2.5	1.7	1.7	264
	388	622	549	5	0.36	2.8	1.9	1.8	342
23976CAKE4 23076CAKE4 24076CAK30E4	398	502	482	3	0.18	5.5	3.7	3.6	65.4
	402	538	506	4	0.22	4.5	3.0	3.0	113
	402	538	496	4	0.29	3.4	2.3	2.3	148
23176CAKE4 24176CAK30E4 23276CAKE4	402	598	540	4	0.30	3.3	2.2	2.2	229
	402	598	529	4	0.38	2.6	1.8	1.7	275
	408	652	578	5	0.35	2.9	1.9	1.9	372
23980CAKE4 23080CAKE4 24080CAK30E4	418	522	501	3	0.18	5.7	3.9	3.8	69.1
	422	578	540	4	0.23	4.4	3.0	2.9	146
	422	578	527	4	0.31	3.3	2.2	2.2	193
23180CAKE4 24180CAK30E4 23280CAKE4	428	622	569	5	0.29	3.4	2.3	2.3	257
	428	622	551	5	0.37	2.7	1.8	1.8	316
	428	692	610	5	0.36	2.8	1.9	1.9	449
23984CAKE4 23084CAKE4 24084CAK30E4	438	542	521	3	0.17	6.0	4.0	3.9	71.6
	442	598	562	4	0.23	4.3	2.9	2.8	151
	442	598	549	4	0.31	3.2	2.2	2.1	199
23184CAKE4 24184CAK30E4 23284CAKE4	448	672	607	5	0.31	3.3	2.2	2.2	341
	448	672	598	5	0.38	2.6	1.8	1.7	421
	456	724	644	6	0.35	2.9	1.9	1.9	534
23988CAKE4 23088CAKE4 24088CAK30E4	458	582	555	3	0.18	5.7	3.9	3.8	96.3
	468	622	587	5	0.23	4.3	2.9	2.8	173
	468	622	576	5	0.31	3.2	2.1	2.1	237
23188CAKE4 24188CAK30E4 23288CAKE4	468	692	627	5	0.3	3.3	2.2	2.2	360
	468	692	617	5	0.37	2.7	1.8	1.8	433
	476	754	669	6	0.35	2.9	1.9	1.9	594

Remarks For the dimensions of adapters and withdrawal sleeves, refer to Pages B364, and B370 – B371.




Cylindrical Bore



Tapered Bore



Without an Oil Groove and Holes



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$


The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing
d	D	B	$r_{min.}$	C_r	C_{0r}	C_r	C_{0r}	Grease	Oil	
										Cylindrical Bore
460	620	118	4	2 220 000	4 950 000	227 000	505 000	430	530	23992CAE4
	680	163	6	3 450 000	7 100 000	355 000	725 000	400	500	23092CAE4
	680	218	6	4 500 000	9 950 000	460 000	1 010 000	340	430	24092CAE4
	760	240	7.5	5 700 000	10 900 000	580 000	1 110 000	300	400	23192CAE4
	760	300	7.5	6 300 000	12 400 000	640 000	1 270 000	300	400	24192CAE4
	830	296	7.5	7 350 000	13 700 000	750 000	1 400 000	280	380	23292CAE4
480	650	128	5	2 580 000	5 850 000	263 000	595 000	400	500	23996CAE4
	700	165	6	3 800 000	7 950 000	385 000	810 000	400	480	23096CAE4
	700	218	6	4 600 000	10 200 000	470 000	1 040 000	320	430	24096CAE4
	790	248	7.5	6 050 000	11 700 000	620 000	1 200 000	300	380	23196CAE4
	790	308	7.5	7 150 000	14 600 000	730 000	1 490 000	300	380	24196CAE4
	870	310	7.5	7 850 000	14 400 000	805 000	1 470 000	260	360	23296CAE4
500	670	128	5	2 460 000	5 550 000	250 000	565 000	400	500	239/500CAE4
	720	167	6	3 750 000	8 100 000	385 000	825 000	380	480	230/500CAE4
	720	218	6	4 450 000	9 900 000	450 000	1 010 000	300	400	240/500CAE4
	830	264	7.5	6 850 000	13 400 000	700 000	1 360 000	280	360	231/500CAE4
	830	325	7.5	8 000 000	16 000 000	815 000	1 630 000	280	360	241/500CAE4
	920	336	7.5	9 000 000	16 600 000	915 000	1 690 000	260	320	232/500CAE4
530	710	136	5	2 930 000	6 800 000	299 000	695 000	360	450	239/530CAE4
	780	185	6	4 400 000	9 200 000	450 000	940 000	340	430	230/530CAE4
	780	250	6	5 400 000	11 800 000	550 000	1 210 000	280	360	240/530CAE4
	870	272	7.5	7 150 000	14 100 000	730 000	1 440 000	260	340	231/530CAE4
	870	335	7.5	8 500 000	17 500 000	870 000	1 790 000	260	340	241/530CAE4
	980	355	9.5	10 100 000	18 800 000	1 030 000	1 920 000	240	300	232/530CAE4
560	750	140	5	3 100 000	7 250 000	320 000	740 000	340	430	239/560CAE4
	820	195	6	5 000 000	10 700 000	510 000	1 090 000	320	400	230/560CAE4
	820	258	6	5 950 000	13 300 000	605 000	1 360 000	260	340	240/560CAE4
	920	280	7.5	7 850 000	15 500 000	800 000	1 580 000	240	320	231/560CAE4
	920	355	7.5	9 400 000	19 600 000	960 000	2 000 000	240	320	241/560CAE4
	1 030	365	9.5	10 900 000	20 500 000	1 110 000	2 090 000	220	280	232/560CAE4

Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).


Numbers	Abutment and Fillet Dimensions (mm)				Constant	Axial Load Factors				Mass (kg)
	d_a min.	d_a max.	D_a min.	r_a max.		e	Y_2	Y_3	Y_0	
Tapered Bore ⁽¹⁾										approx.
23992CAKE4	478	602	575	3	0.17	5.9	4.0	3.9		100
23092CAKE4	488	652	615	5	0.22	4.6	3.1	3.0		201
24092CAK30E4	488	652	604	5	0.29	3.4	2.3	2.3		266
23192CAKE4	496	724	661	6	0.31	3.3	2.2	2.2		423
24192CAK30E4	496	724	646	6	0.39	2.6	1.7	1.7		512
23292CAKE4	496	794	702	6	0.36	2.8	1.9	1.8		691
23996CAKE4	502	628	602	4	0.18	5.7	3.8	3.7		121
23096CAKE4	508	672	633	5	0.22	4.6	3.1	3.0		211
24096CAK30E4	508	672	625	5	0.30	3.4	2.3	2.2		270
23196CAKE4	516	754	688	6	0.31	3.3	2.2	2.2		475
24196CAK30E4	516	754	670	6	0.39	2.6	1.7	1.7		567
23296CAKE4	516	834	733	6	0.36	2.8	1.9	1.8		795
239/500CAKE4	522	648	622	4	0.17	6.0	4.0	3.9		124
230/500CAKE4	528	692	655	5	0.21	4.8	3.2	3.1		220
240/500CAK30E4	528	692	643	5	0.30	3.4	2.3	2.2		276
231/500CAKE4	536	794	720	6	0.31	3.2	2.2	2.1		567
241/500CAK30E4	536	794	703	6	0.39	2.6	1.7	1.7		666
232/500CAKE4	536	884	773	6	0.38	2.7	1.8	1.8		969
239/530CAKE4	552	688	659	4	0.17	6.0	4.0	3.9		149
230/530CAKE4	558	752	706	5	0.22	4.6	3.1	3.0		298
240/530CAK30E4	558	752	690	5	0.31	3.3	2.2	2.2		390
231/530CAKE4	566	834	758	6	0.30	3.3	2.2	2.2		628
241/530CAK30E4	566	834	740	6	0.38	2.6	1.8	1.7		773
232/530CAKE4	574	936	824	8	0.38	2.7	1.8	1.7		1 170
239/560CAKE4	582	728	697	4	0.16	6.1	4.1	4.0		172
230/560CAKE4	588	792	742	5	0.22	4.5	3.0	2.9		344
240/560CAK30E4	588	792	729	5	0.30	3.3	2.2	2.2		440
231/560CAKE4	596	884	804	6	0.30	3.4	2.3	2.2		727
241/560CAK30E4	596	884	782	6	0.39	2.6	1.8	1.7		886
232/560CAKE4	604	986	870	8	0.36	2.8	1.9	1.8		1 320

Remarks For the dimensions of adapters and withdrawal sleeves, refer to Pages B365 and B371.

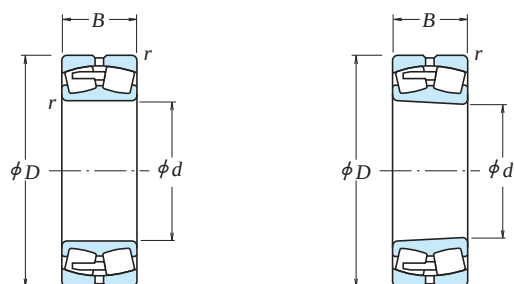

Cylindrical Bore

Tapered Bore



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load


$$P_0 = F_r + Y_0 F_a$$

The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings (N)				Limiting Speeds (min ⁻¹)		Bearing Cylindrical Bore
d	D	B	$r_{min.}$	C_r	C_{0r}	C_r	C_{0r}	Grease	Oil	
600	800	150	5	3 450 000	8 100 000	350 000	830 000	320	400	239/600CAE4
	870	200	6	5 450 000	12 200 000	555 000	1 240 000	300	360	230/600CAE4
	870	272	6	6 600 000	15 100 000	675 000	1 540 000	240	320	240/600CAE4
	980	300	7.5	8 750 000	17 500 000	895 000	1 790 000	220	280	231/600CAE4
	980	375	7.5	10 400 000	21 900 000	1 060 000	2 230 000	220	280	241/600CAE4
630	1 090	388	9.5	12 700 000	24 900 000	1 300 000	2 540 000	200	260	232/600CAE4
	850	165	6	4 000 000	9 350 000	405 000	950 000	300	360	239/630CAE4
	920	212	7.5	5 900 000	12 700 000	600 000	1 300 000	280	340	230/630CAE4
	920	290	7.5	7 550 000	17 700 000	770 000	1 810 000	220	300	240/630CAE4
	1 030	315	7.5	9 600 000	19 400 000	980 000	1 970 000	200	260	231/630CAE4
670	1 030	400	7.5	11 300 000	23 900 000	1 160 000	2 440 000	200	260	241/630CAE4
	1 150	412	12	13 400 000	25 600 000	1 370 000	2 610 000	180	240	232/630CAE4
	900	170	6	4 350 000	10 300 000	445 000	1 050 000	260	340	239/670CAE4
	980	230	7.5	6 850 000	15 000 000	700 000	1 530 000	240	320	230/670CAE4
	980	308	7.5	8 450 000	19 500 000	860 000	1 990 000	200	260	240/670CAE4
710	1 090	336	7.5	10 600 000	21 600 000	1 080 000	2 200 000	190	240	231/670CAE4
	1 090	412	7.5	12 400 000	26 500 000	1 270 000	2 700 000	190	240	241/670CAE4
	1 220	438	12	14 900 000	28 700 000	1 520 000	2 920 000	170	220	232/670CAE4
	950	180	6	4 800 000	11 700 000	490 000	1 200 000	240	300	239/710CAE4
	1 030	236	7.5	7 100 000	15 800 000	725 000	1 610 000	240	280	230/710CAE4
750	1 030	315	7.5	8 850 000	20 700 000	905 000	2 110 000	190	240	240/710CAE4
	1 150	438	9.5	13 900 000	30 500 000	1 410 000	3 100 000	170	220	241/710CAE4
	1 280	450	12	15 700 000	30 500 000	1 600 000	3 100 000	160	200	232/710CAE4
	1 000	185	6	5 250 000	12 800 000	535 000	1 310 000	220	280	239/750CAE4
	1 090	250	7.5	7 750 000	17 200 000	790 000	1 750 000	220	260	230/750CAE4
800	1 090	335	7.5	10 100 000	24 000 000	1 030 000	2 450 000	180	220	240/750CAE4
	1 360	475	15	17 700 000	35 500 000	1 800 000	3 600 000	140	190	232/750CAE4
	1 060	195	6	5 600 000	13 700 000	570 000	1 400 000	220	260	239/800CAE4
	1 150	258	7.5	8 350 000	19 100 000	850 000	1 950 000	200	240	230/800CAE4
	1 150	345	7.5	10 900 000	26 300 000	1 110 000	2 680 000	160	200	240/800CAE4
800	1 280	375	9.5	13 800 000	29 200 000	1 410 000	2 970 000	150	190	231/800CAE4
	1 420	488	15	20 300 000	41 000 000	2 070 000	4 150 000	130	170	232/800CAE4


Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)				Constant	Axial Load Factors			Mass (kg)
Tapered Bore ⁽¹⁾	d_a min.	D_a max.	d_a min.	r_a max.	e	Y_2	Y_3	Y_0	approx.
239/600CAKE4	622	778	745	4	0.17	5.9	3.9	3.9	205
230/600CAKE4	628	842	794	5	0.21	4.8	3.3	3.2	389
240/600CAK30E4	628	842	772	5	0.30	3.3	2.2	2.2	529
231/600CAKE4	636	944	856	6	0.30	3.4	2.3	2.2	898
241/600CAK30E4	636	944	836	6	0.39	2.6	1.8	1.7	1 050
232/600CAKE4	644	1 046	923	8	0.36	2.8	1.9	1.8	1 590
239/630CAKE4	658	822	786	5	0.18	5.6	3.8	3.7	259
230/630CAKE4	666	884	835	6	0.22	4.7	3.1	3.1	468
240/630CAK30E4	666	884	815	6	0.30	3.3	2.2	2.2	637
231/630CAKE4	666	994	900	6	0.30	3.4	2.3	2.2	1 040
241/630CAK30E4	666	994	876	6	0.38	2.7	1.8	1.7	1 250
232/630CAKE4	684	1 096	970	10	0.36	2.8	1.9	1.8	1 850
239/670CAKE4	698	872	836	5	0.17	5.8	3.9	3.8	300
230/670CAKE4	706	944	891	6	0.22	4.7	3.1	3.1	571
240/670CAK30E4	706	944	868	6	0.30	3.3	2.2	2.2	773
231/670CAKE4	706	1 054	952	6	0.30	3.3	2.2	2.2	1 230
241/670CAK30E4	706	1 054	934	6	0.37	2.7	1.8	1.8	1 440
232/670CAKE4	724	1 166	1 024	10	0.37	2.7	1.8	1.8	2 210
239/710CAKE4	738	922	883	5	0.17	5.8	3.9	3.8	352
230/710CAKE4	746	994	936	6	0.22	4.6	3.1	3.0	647
240/710CAK30E4	746	994	916	6	0.29	3.4	2.3	2.2	861
241/710CAK30E4	754	1 106	981	8	0.38	2.6	1.8	1.7	1 730
232/710CAKE4	764	1 226	1 080	10	0.36	2.8	1.9	1.8	2 470
239/750CAKE4	778	972	931	5	0.17	6.0	4.1	4.0	398
230/750CAKE4	786	1 054	990	6	0.22	4.6	3.1	3.0	768
240/750CAK30E4	786	1 054	969	6	0.29	3.4	2.3	2.2	1 030
232/750CAKE4	814	1 296	1 148	12	0.36	2.8	1.9	1.8	2 980
239/800CAKE4	828	1 032	987	5	0.17	6.0	4.0	3.9	462
230/800CAKE4	836	1 114	1 045	6	0.21	4.7	3.2	3.1	870
240/800CAK30E4	836	1 114	1 029	6	0.27	3.7	2.5	2.5	1 130
231/800CAKE4	844	1 236	1 127	8	0.28	3.6	2.4	2.3	1 870
232/800CAKE4	864	1 356	1 208	12	0.35	2.8	1.9	1.9	3 250

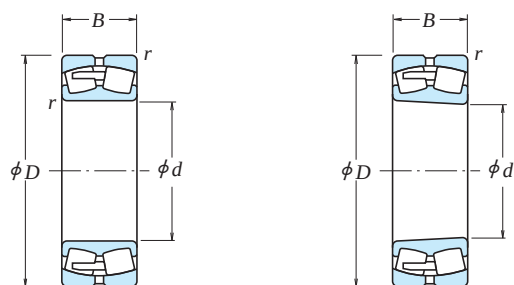

Cylindrical Bore

Tapered Bore



Dynamic Equivalent Load

$$P = XF_r + YF_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y_3	0.67	Y_2

Static Equivalent Load

$$P_0 = F_r + Y_0 F_a$$

The values of e , Y_2 , Y_3 , and Y_0 are given in the table below.

Boundary Dimensions (mm)				Basic Load Ratings				Limiting Speeds (min ⁻¹)		Bearing
d	D	B	$r_{min.}$	(N)		{kgf}		Grease	Oil	
				C_r	C_{0r}	C_r	C_{0r}			Cylindrical Bore
850	1 120	200	6	6 100 000	15 200 000	620 000	1 550 000	190	240	239/850CAE4 230/850CAE4
	1 220	272	7.5	9 300 000	21 400 000	945 000	2 190 000	180	220	
	1 220	365	7.5	11 600 000	28 300 000	1 180 000	2 890 000	150	190	240/850CAE4 232/850CAE4
	1 500	515	15	22 300 000	45 500 000	2 270 000	4 650 000	120	160	
900	1 180	206	6	6 600 000	16 700 000	670 000	1 700 000	180	220	239/900CAE4 230/900CAE4
	1 280	280	7.5	9 850 000	22 800 000	1 000 000	2 330 000	160	200	
	1 280	375	7.5	12 800 000	31 500 000	1 300 000	3 250 000	140	180	240/900CAE4 232/900CAE4
	1 580	515	15	23 400 000	47 500 000	2 380 000	4 850 000	110	140	
950	1 250	224	7.5	7 600 000	19 900 000	775 000	2 030 000	160	200	239/950CAE4 230/950CAE4
	1 360	300	7.5	11 300 000	26 500 000	1 160 000	2 710 000	150	190	
	1 360	412	7.5	14 500 000	36 500 000	1 480 000	3 700 000	120	160	240/950CAE4 232/950CAE4
	1 660	530	15	24 700 000	50 500 000	2 520 000	5 150 000	100	130	
1 000	1 320	236	7.5	8 200 000	21 700 000	835 000	2 210 000	150	190	239/1000CAE4 230/1000CAE4 240/1000CAE4
	1 420	308	7.5	11 900 000	28 100 000	1 210 000	2 860 000	140	170	
	1 420	412	7.5	15 300 000	38 500 000	1 560 000	3 950 000	110	150	
1 060	1 400	250	7.5	9 300 000	24 400 000	950 000	2 490 000	130	170	239/1060CAE4 230/1060CAE4 240/1060CAE4
	1 500	325	9.5	13 000 000	31 500 000	1 330 000	3 200 000	120	160	
	1 500	438	9.5	16 800 000	43 000 000	1 720 000	4 350 000	100	130	
1 120	1 580	345	9.5	15 400 000	38 000 000	1 570 000	3 850 000	110	140	230/1120CAE4 240/1120CAE4
	1 580	462	9.5	18 700 000	49 500 000	1 910 000	5 050 000	95	120	
1 180	1 660	475	9.5	20 200 000	52 500 000	2 060 000	5 350 000	85	110	240/1180CAE4
1 250	1 750	500	9.5	21 000 000	59 500 000	2 140 000	6 050 000	75	100	240/1250CAE4
1 320	1 850	530	12	22 600 000	63 500 000	2 310 000	6 500 000	67	85	240/1320CAE4
1 400	1 950	545	12	24 500 000	65 000 000	2 500 000	6 650 000	60	75	240/1400CAE4

Note (1) The suffix K or K30 represents bearings with tapered bores (taper 1 : 12 or 1 : 30).

Numbers	Abutment and Fillet Dimensions (mm)				Constant	Axial Load Factors				Mass (kg)
	d_a min.	d_a max.	D_a min.	r_a max.		e	Y_2	Y_3	Y_0	
Tapered Bore ⁽¹⁾										approx.
239/850CAKE4 230/850CAKE4	878	1 092	1 046	5	0.16	6.2	4.2	4.1		523
	886	1 184	1 109	6	0.21	4.8	3.2	3.1		1 020
240/850CAK30E4 232/850CAKE4	886	1 184	1 093	6	0.28	3.6	2.4	2.4		1 350
	914	1 436	1 274	12	0.35	2.8	1.9	1.9		3 890
239/900CAKE4 230/900CAKE4	928	1 152	1 103	5	0.16	6.4	4.3	4.2		591
	936	1 244	1 169	6	0.20	4.9	3.3	3.2		1 160
240/900CAK30E4 232/900CAKE4	936	1 244	1 147	6	0.28	3.6	2.4	2.4		1 520
	964	1 516	1 354	12	0.33	3.0	2.0	2.0		4 300
239/950CAKE4 230/950CAKE4	986	1 214	1 169	6	0.16	6.3	4.2	4.1		732
	986	1 324	1 241	6	0.21	4.8	3.2	3.2		1 400
240/950CAK30E4 232/950CAKE4	986	1 324	1 219	6	0.28	3.6	2.4	2.3		1 880
	1 014	1 596	1 428	12	0.32	3.1	2.1	2.1		4 800
239/1000CAKE4 230/1000CAKE4 240/1000CAK30E4	1 036	1 284	1 229	6	0.16	6.4	4.3	4.2		881
	1 036	1 384	1 298	6	0.20	4.9	3.3	3.2		1 560
	1 036	1 384	1 275	6	0.27	3.7	2.5	2.4		2 010
239/1060CAKE4 230/1060CAKE4 240/1060CAK30E4	1 096	1 364	1 302	6	0.16	6.1	4.1	4.0		1 030
	1 104	1 456	1 368	8	0.21	4.9	3.3	3.2		1 790
	1 104	1 456	1 346	8	0.28	3.6	2.4	2.4		2 410
230/1120CAKE4 240/1120CAK30E4	1 164	1 536	1 444	8	0.20	5.0	3.4	3.3		2 120
	1 164	1 536	1 421	8	0.27	3.7	2.5	2.5		2 790
240/1180CAK30E4	1 224	1 616	1 494	8	0.27	3.7	2.5	2.4		3 180
240/1250CAK30E4	1 294	1 706	1 579	8	0.25	4.0	2.7	2.6		3 700
240/1320CAK30E4	1 374	1 796	1 656	10	0.26	3.9	2.6	2.6		4 400
240/1400CAK30E4	1 454	1 896	1 767	10	0.25	4.0	2.7	2.6		4 900



Shaanxi Gainhui Heavy Industries Co., Ltd.
Bearing Manufacturer And Supplier In China

BECAUSE WE ARE FOCUSED WE ARE PROFESSIONAL

We are committed to providing competitive bearing products and OEM services to global customers.



Founded in 2009, Shaanxi Gainhui Heavy Industries Co., Ltd. covers an area of 16,000 square meters, which is a professional bearing manufacturer and distributor in China. The company is committed to the design, manufacture and service of precision bearings, focusing on providing customers with reliable bearing products and cost-effective technical solutions.

The company adopts advanced production equipment and testing equipment, is equipped with a professional quality testing department, formulates a complete quality management system, and specializes in the production of high-precision, low-noise, and long-life bearings. Shaanxi Gainhui Heavy Industries Co., Ltd. insists on quality as the core, innovation as the driving force, promotes development through service, and sincerely provides services to customers all over the world.



Contact us:

Website: www.ghbearings.com

Tel: +86-029-88692376

Mob/WhatsApp: +86-18710850036

Skype: tina.li72

E-mail: info@ghbearings.com

Add: NO.196, Changan South Road,
Xi'an City, Shaanxi Province, China

